

## DH-HAC-HFW1100R-VF

---

1Megapixel 720P Water-proof HDCVI IR-Bullet Camera



### Features

- 1/2.9" 1Megapixel CMOS
- 25/30fps@720P
- High speed, long distance real-time transmission
- Day/Night(ICR), AWB, AGC, BLC, 2D-DNR
- 2.7~12mm vari-focal lens
- Max. IR LEDs length 30m, Smart IR
- IP67, DC12V


# DH-HAC-HFW1100R-VF

## Technical Specifications


| Model                  | DH-HAC-HFW1100RP-VF                              | DH-HAC-HFW1100RN-VF |
|------------------------|--|---------------------|
| <b>Camera</b>          |  |                     |
| Image Sensor           | 1/2.9" 1Megapixel CMOS                           |                     |
| Effective Pixels       | 1280(H)×720(V)                                   |                     |
| Electronic Shutter     | 1/50s~1/100,000s                                 | 1/60s~1/100,000s    |
| Video Frame Rate       | 25fps@720P                                       | 30fps@720P          |
| Synchronization        | Internal   |                     |
| Mini. Illumination     | 0.01Lux@F1.2(AGC ON), 0Lux IR on                 |                     |
| Video Output           | 1-channel BNC HDCVI high definition video output |                     |
| <b>Camera Features</b> |  |                     |
| Max. IR LEDs Length    | 30m, Smart IR                                    |                     |
| Day/Night              | Auto(ICR) / Color / B/W                          |                     |
| Noise Reduction        | 2D   |                     |
| <b>Lens</b>            |  |                     |
| Focal Length           | 2.7~12mm   |                     |
| Angle of View          | H: 105.5° ~32.9°                                 |                     |
| Lens Type              | Manual / Fixed Iris                              |                     |
| Mount Type             | Φ14  |                     |
| <b>General</b>         |  |                     |
| Power Supply           | DC12V±10%  |                     |
| Power Consumption      | Max 3.2W   |                     |
| Working Environment    | -30°C~+60°C / Less than 95%RH (no condensation)  |                     |
| Transmission Distance  | Over 800m via 75-3 coaxial cable                 |                     |
| Ingress Protection     | IP67   |                     |
| Dimensions(W×D×H)      | 213mm×80mm×72mm                                  |                     |
| Weight                 | 0.55kg   |                     |
| Material               | Metal  |                     |

# DH-HAC-HFW1100R-VF

## Dimensions (mm)

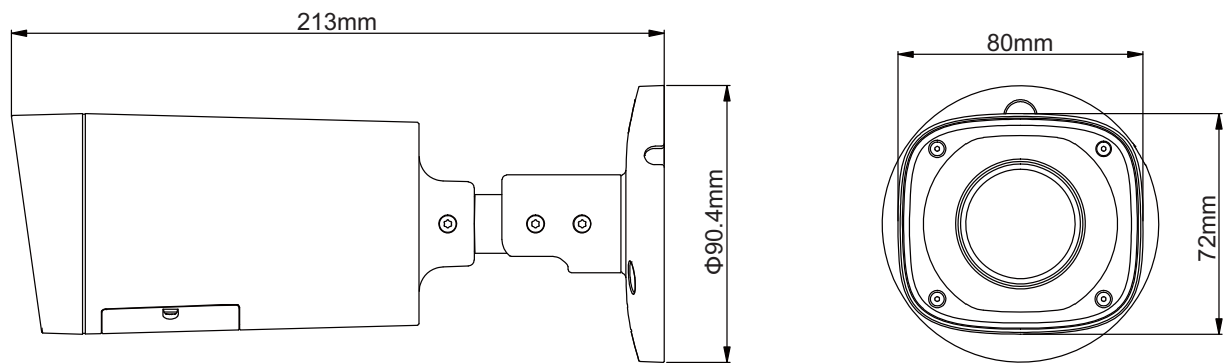

## Accessories (optional)

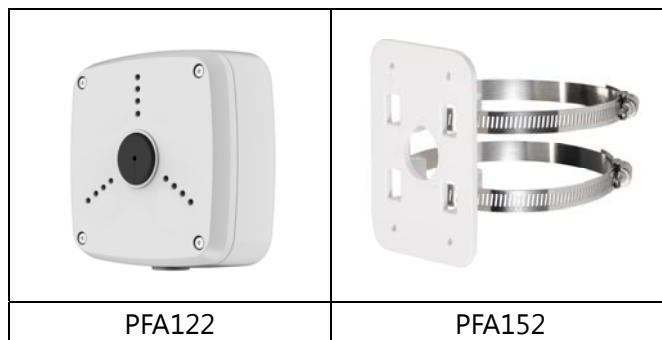

---

### Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: [overseas@dahuatech.com](mailto:overseas@dahuatech.com)

[www.dahuatech.com](http://www.dahuatech.com)

\*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.