




A Tyco International Company

## PowerSeries PC1404 Control Panel

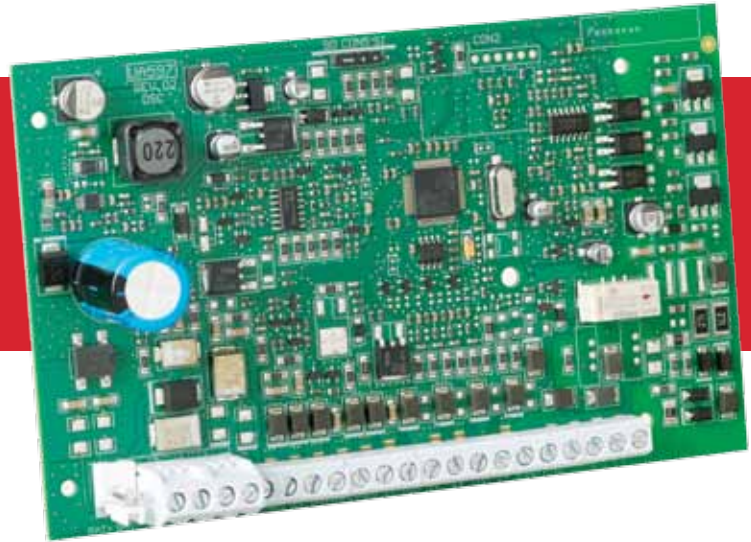

### Features That Make a Difference:

- 4 on-board zones, expandable to 8
- Supports up to 4 keypads including the new PC1404RKZ keypad
- Supports up to 4 phone numbers
- Single partition
- 128 event buffer
- 2 on-board PGM outputs (50 mA and 300 mA),
- PGM expandable to 14 total (8 x 50 mA with PC5208, 4 x 500 mA with PC5204)
- Supports up to 39 user codes and 1 master code with 6 programmable user code attributes
- Continuously monitors potential trouble conditions
- Numerous false alarm prevention features
- Supports either 2- or 4-wire smoke detectors. *NOTE: Using a 2-wire smoke detector does not require a separate zone*
- Flexible zone configuration: 29 zone types and 11 programmable zone attributes

### PowerSeries PC1404 Control Panels: Uncompromised Quality and Security in a Basic Package

Introducing the PowerSeries PC1404 Control Panel from DSC – the newest entry in the PowerSeries control panel product family. This economical wired 4-zone control panel packs a punch while delivering the features, quality and reliability you and your customers have come to expect from DSC.

### Economical Solution

The PowerSeries PC1404 Control Panel is ideal for budget-conscious buyers unwilling to compromise on a robust security solution. This panel now completes the other models in the PowerSeries Control Panel line: PC1616, PC1832 and PC1864.

### Versatility to Optimize Design

The PowerSeries PC1404 Control Panel provides the versatility and flexibility you require to deliver an optimal security solution. Here are

just a few of the configurable options available:

- Supports up to 4 hardwired NC, single EOL, double EOL zones, expandable to 8 with zone doubling on main panel or using keypad zones
- Includes 2 onboard PGM outputs (PGM 1: 50mA switched, PGM 2: 300mA current-limited switched; supports 2-wire smoke detectors. Easily expandable to 14 using expansion modules
- Supports 25 PGM types
- Supports 29 zone types and 11 programmable zone attributes
- Supports 39 user codes and 1 master code with 6 programmable user code attributes
- Supports up to 4 phone numbers so any alarm calls get through

Security is at the forefront with the PowerSeries PC1404 Control Panel as up to 4 phone numbers can be programmed to call in case of an

panels, keypads & modules

alarm event. There are also False Alarm Prevention features that include:

- Audible Exit Delay
- Audible Exit Fault
- Communication Delay
- Entry Delay Urgency
- Quick Exit
- Cross Zone Burglary Alarm
- Rotating Keypress Buffer

### Standard PowerSeries Features:

- PC-Link Support
- On-board PSTN
- Auto arming
- Programmable Daylight Savings Time
- DLS IV Support

The basic yet mighty PowerSeries PC1404 Control Panel delivers a high-quality, optimal solution, ideal for budget-conscious residential installations.

### Specifications

Power Supply .....	16.5 VAC/40 VA @ 50/60 Hz
Current Draw (Panel).....	85 mA (Nominal)
Auxiliary & Output .....	13.75 ± 5% Vdc /550 mA
Bell Output .....	13.75 ± 5% Vdc /700 mA
Operating Environment .....	14° to 131° F (-10° to +55° C)