

The Convenience at the Edge of your Network



1/4" CMOS H.264 Network Dome Camera

SND-1010

The SND-1010 is equipped with highly-efficient H.264 / MPEG4 / MJPEG video compression that delivers superior image clarity and allows flexibility depending on user network environment. Multi streaming support in the SND-1010 lets it transfer videos at 30fps(NTSC) at all resolutions to give the user a variety of video transfer options for optimum performance.

- Max. 30fps at VGA (640 x 480) resolution
- Built-in 2.9mm fixed lens
- H.264 / MPEG4 / MJPEG multiple codec
- Multiple streaming simultaneously



1/4" CMOS H.264 Network Dome Camera

SND-1010




Specifications

	SND-1010N	SND-1010P
VIDEO		
Imaging Device	1/4" PS CMOS	
Total Pixels	656(H) x 488(V)	
Effective Pixels	640(H) x 480(V)	
Scanning System	Progressive	
Min. Illumination	Color : 1.4Lux (F1.2, 50IRE), 0.17Lux (Sens-up 8x)	
S / N Ratio	50dB	
LENS		
Focal Length (Zoom Ratio)	2.9mm	
Max. Aperture Ratio	F2.0	
Angular Field of View	H : 68°, V : 50°, D : 85°	
Lens Type	Fixed Iris	
Mount Type	Board-in Type	
OPERATIONAL		
On Screen Display	English, French, German, Spanish, Italian, Korean, Chinese, Russian, Japanese, Danish, Swedish, Portuguese	
Motion Detection	Yes	
Sens-up (Frame Integration)	Off / Auto (2x ~ 8x)	
Gain Control	2x, 4x, 8x, 16x, 32x	
White Balance	Auto / Manual	
Flip / Mirror	Off / On	
Alarm I/O	Input 1ea / Output 1ea (Relay)	
NETWORK		
Ethernet	RJ-45 (10/100BASE-T)	
Video Compression Format	H.264, MPEG4, MJPEG	
Resolution	640 x 480, 320 x 240	
Max. Framerate	30fps	25fps
Video Quality Adjustment	H.264 / MPEG4 : Compression Level, Target Bitrate Level Control, MJPEG : Quality Level Control	
Bitrate Control Method	H.264 / MPEG4 : CBR or VBR, MJPEG : VBR	
Streaming Capability	Multiple Streaming (Up to 10 Profiles)	
IP	IPv4, IPv6	
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTSP, NTP, HTTP, HTTPS, SSL, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS	
Security	HTTPS(SSL) Login Authentication, Digest Login Authentication, IP Address Filtering, User access Log	
Streaming Method	Unicast / Multicast	
Max. User Access	5 users at Unicast Mode	
ONVIF Conformance	Yes	
Web Viewer	Supported OS : Windows XP / VISTA / 7, MAC OS Supported Browser : Internet Explorer 6.0 or Higher, Firefox, Google Chrome, Apple Safari	
Central Management Software	NET-I viewer	
ENVIRONMENTAL		
Operating Temperature / Humidity	0°C ~ +50°C (+32°F ~ +122°F) / 20% ~ 80% RH	
ELECTRICAL		
Input Voltage / Current	12V DC, PoE (IEEE802.3af)	
Power Consumption	Max. 2.5W	
MECHANICAL		
Color / Material	White / Plastic	
Dimension (WxHxD)	78 x Ø102mm (3.07" x 4.02")	
Weight	200g (0.44lb)	

Dimensions

Unit : mm (inch)

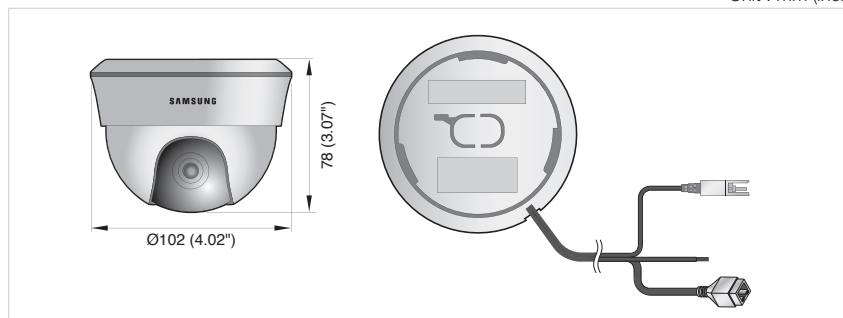

The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

Design and specifications are subject to change without notice.



SAMSUNG TECHWIN CO., LTD.

701, Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do Korea 463-400
Tel : +82-70-7147-8741~8749, 8752-8760 Fax : +82-31-8018-3745
www.samsungipolis.com www.samsungsecurity.com

SAMSUNG TECHWIN AMERICA Inc.
1480 Charles Willard St. Carson, CA 90746, UNITED STATES
Tel Free : +1-877-213-1222 Fax : +1-310-632-2195
www.samsungcctvusa.com

SAMSUNG TECHWIN EUROPE LTD.
Samsung House, 1000 Hillwood Drive, Hillwood Business Park
Chertsey, Surrey, UNITED KINGDOM KT16 0PS
Tel : +44-1932-45-5300 Fax : +44-1932-45-5325

TIANJIN SAMSUNG TECHWIN OPTO-ELECTRONICS CO., LTD.
No.11 Wei 6 Street, Micro-Electronic Industrial Park
Jingang Road, Tianjin, P.R. CHINA 300385
Tel : +86-22-23887788 Fax : +86-22-23887788

■ DISTRIBUTED BY

